


# Uitwerppennen DIN ISO 6751 gehard AH-RVS

## Ejector pins DIN ISO 6751 hardened AH-RVS

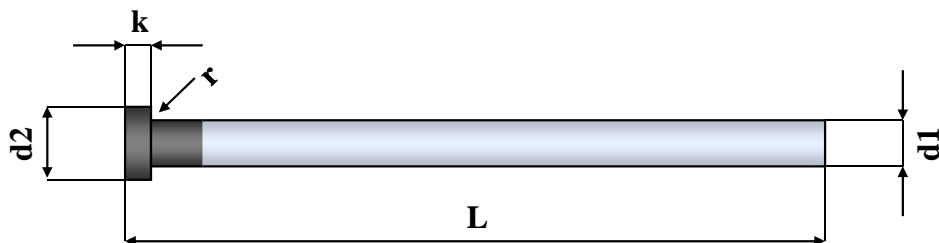

Artikel nr: 4015

Item nr: 4015

Materiaal: 1.4112

Material: 1.4112

Hardheid:  $56 \pm 2$  HRC

Hardness:  $56 \pm 2$  HRC

d1	d2	k	L +2					
			100	125	160	200	250	315
1,0	2,5	1,2	o.a. - o.r.	o.a. - o.r.				
1,5	3	1,5					o.a. - o.r.	
2,0	4	2	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.		
2,5	5		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
2,7						o.a. - o.r.		
3,0	6	3	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
3,5	7		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
4,0	8		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
4,5			o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
5,0	10		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
5,5			o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
6,0		5	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
6,5	12						o.a. - o.r.	
7,0							o.a. - o.r.	
8,0	14		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.
10,0	16		o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	
12,0	18		7	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.	o.a. - o.r.

Uit voorraad leverbaar. Andere maten op aanvraag, o.a. is op aanvraag.

Available from stock. Other dimensions on request, o.r. is on request.