


Uitwerppennen DIN ISO 6751 geoxideerd A

Ejector pins DIN ISO 6751 oxidized A

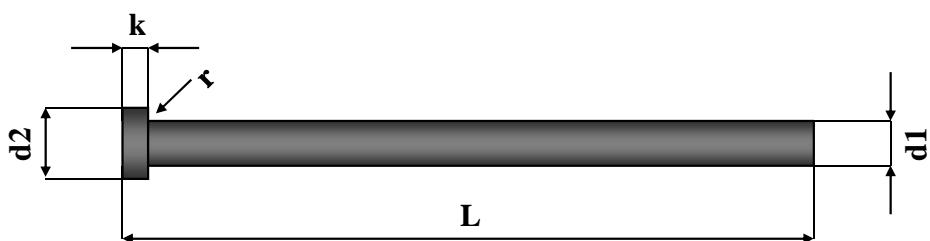

Artikel nr: 4030

Item nr: 4030

Materiaal: 1.2343 - 1.2344

Material: 1.2343 - 1.2344

Hardheid: min. 950 HV_{0,3}

Hardness: min. 950 HV_{0,3}

d1 g6	d2 -0,2	k -0,05	L +2										
			100	125	160	200	250	315	400	500	630	800	1000
1,5	3	1,5	●	●	●	●							
2,0	4	2	●	●	●	●	●	●					
2,2			●	●	●	●	●	●					
2,5			●	●	●	●	●	●					
2,7			●	●	●	●	●	●					
3,0			●	●	●	●	●	●	●	●			
3,2	6	3	●	●	●	●	●	●	●				
3,5			●	●	●	●	●	●	●				
3,7			●	●	●	●	●	●	●				
4,0			●	●	●	●	●	●	●	●			
4,2			●	●	●	●	●	●	●				
4,5	8	3	●	●	●	●	●	●	●				
5,0			●	●	●	●	●	●	●	●	●	●	
5,2			●	●	●	●	●	●	●	●			
5,5			●	●	●	●	●	●	●	●	●		
6,0			●	●	●	●	●	●	●	●	●	●	●
6,2	12	5	●	●	●	●	●	●	●	●	●		
6,5			●	●	●	●	●	●	●	●	●	●	
7,0			●	●	●	●	●	●	●	●	●	●	
7,5			●	●	●	●	●	●	●	●	●		
8,0			●	●	●	●	●	●	●	●	●	●	
8,2	14	7	●	●	●	●	●	●	●	●	●	●	
8,5			●	●	●	●	●	●	●	●	●	●	
9,0			●	●	●	●	●	●	●	●	●	●	
10,0			●	●	●	●	●	●	●	●	●	●	
10,2			●	●	●	●	●	●	●	●	●		
10,5	16	7	●	●	●	●	●	●	●	●	●		
11,0			●	●	●	●	●	●	●	●	●		
12,0			●	●	●	●	●	●	●	●	●	●	
12,2			●	●	●	●	●	●	●	●	●		
12,5			●	●	●	●	●	●	●	●	●		
14,0	22	8	●	●	●	●	●	●	●	●	●	●	
16,0			●	●	●	●	●	●	●	●	●	●	
18,0			●	●	●	●	●	●	●	●	●		
20,0	26		●	●	●	●	●	●	●	●	●	●	
25,0	32				●	●	●	●	●	●	●	●	
32,0	40	10				●	●	●	●	●	●	●	

● = Uit voorraad leverbaar. Andere maten op aanvraag.

● = Available from stock. Other dimensions on request.